



SLEWING DRIVES		REF.: TGE236-Z0A-RI	
MODULE	3.25	MM	
NUMBER OF WORMS	1	-	
GEAR RATIO	71:1	-	
EFFICIENCY	40%	-	
SELF-LOCKING GEARS	YES	-	
WEIGHT	54	LB	
HOLES	- NA 8 (UNC 1/2")	Nº	
HOLES	- NI 10 (UNC 1/2")	Nº	
MAXIMUM TORQUE	1075	LBF·FT	
NOMINAL TORQUE	768	LBF·FT	
TILTING MOMENT	10000	LBF·FT	
STATIC LOAD RATING, RADIAL	11915	LBF	
STATIC LOAD RATING, AXIAL	29900	LBF	
DYNAMIC LOAD RATING, RADIAL	6300	LBF	
DYNAMIC LOAD RATING, AXIAL	7200	LBF	

ALL THE SLEWING DRIVES ARE PRE-LUBRICATED WITH EXTERNAL AND INTERNAL GREASE-NIPPLES

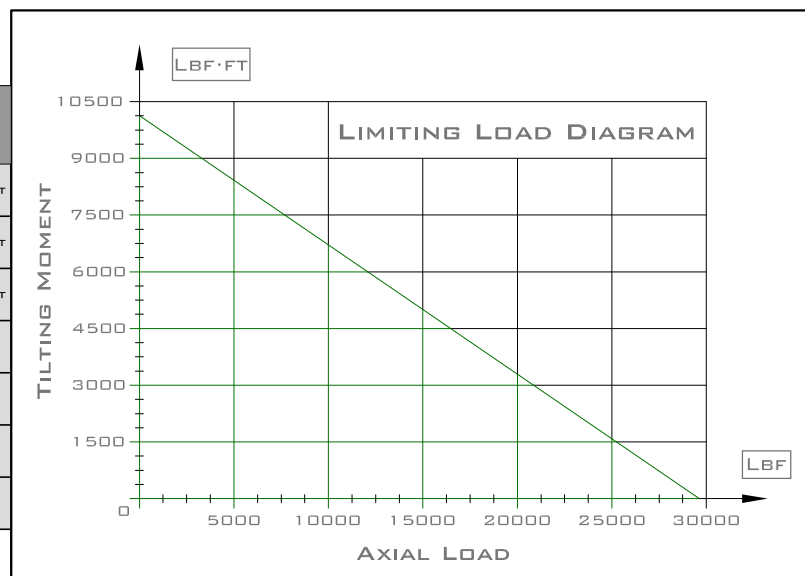

The information contained in this document is property of TGBgroup. It is not allowable any copy or reproduction of this certificated copy with the original not under control. TGBgroup reserve changes of manufacture without previous advice and duty of communication.

Units: mm [inches]

>1200	±1.2	 TGBGROUP info@TGBgroup.es www.TGBGROUP.ES	
>400.0 ~ 1200	±0.8		
>120.0~400.0	±0.5		
>30.0~120.0	±0.3		
>6.0~30.0	±0.2		
>3.0~6.0	±0.1		
>0.3 ~3.0	±0.1		
Range of sizes	Unstated Tolerance		
Reference	TGE236-Z0A-RI		
Denomination	Sales Drawing		
MATERIAL:	-	WEIGHT [kg]: 24,5	NUM. PIECES: 1
SCALE:	1/2	SIZE: A3	SHEET: 1 of 1